


SAND-PERFECT 100

The Sand-Perfect 100 is designed for sanding of all kinds of edges and items with complex contours. The table makes it easy to handle the workpieces and any unnecessary lifting of the items is avoided.

The Sand-Perfect 100 can be delivered with height adjustable core which ensures an optimal usage of the sanding brushes, and furthermore, you are able to have cores with different diameters for sanding of different profiles.

The Sand-Perfect 100 is equipped with a tiltable shaft so that it can work with both a Flex Trim disc, and a traditional drum from Flex Trim.

The Sand-Perfect 100 is easy and simple to operate via a control panel at the front of the machine. The Sand-Perfect 100 has height adjustable rubber feet which eliminate all vibrations.

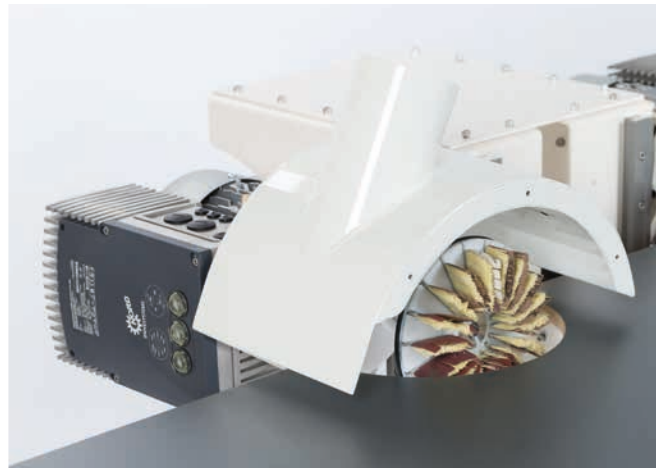

Technical specifications:

Motor:	1 x 1.1 kW
Sanding Roller speed:	100-450 RPM
Electrical supply:	230 V, 50/60 Hz, 16 A
Dust extraction:	1 x Ø80 mm ports (as standard)
Dimensions:	
Height:	980 mm (table is adjustable)
Width:	1200 mm
Depth:	600 mm

SAND-PERFECT 100-100

The Sand-Perfect 100-100 is a very flexible machine designed for sanding of all kinds of edges and items with complex contours. The machine is mounted with 2 individually working shafts. This means that it can either be operated by 2 persons at the same time, or be used with different sanding solutions. The shafts can rotate in whatever direction you wish.

The table makes it easy to handle the workpieces and any unnecessary lifting of the items is avoided.

The Sand-Perfect 100-100 can be delivered with height adjustable cores which ensure an optimal usage of the sanding brushes, and furthermore, you are able to have

cores with different diameters for sanding of different profiles.

The Sand-Perfect 100-100 is equipped with a tiltable shaft so that it can work with both a Flex Trim disc, and a traditional drum from Flex Trim.

The Sand-Perfect 100-100 is easy and simple to operate via a control panel at the front of the machine. The Sand-Perfect 100-100 is mounted with height adjustable rubber feet which eliminate all vibrations.

Technical specifications:

Motor: 2 x 1.1 kW

Sanding Roller speed: 100-450 RPM

Electrical supply: 230 V, 50/60 Hz, 16 A

Dust extraction: 2 x Ø80 mm ports (as standard)

Dimensions:

Height: 1250 mm (table is adjustable)

Width: 1700 mm

Depth: 600 mm

